


LOKUM

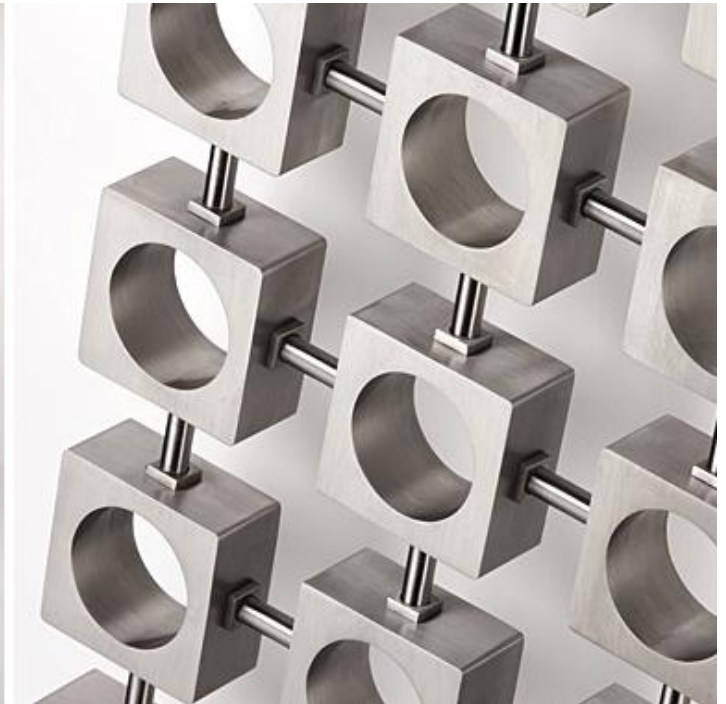

MAX.WORKING PRESSURE 10 Bar

MAX.WORKING TEMPERATURE 95°C

OPEN/CLOSED HEATING SYSTEM O-C

MATERIAL STAINLESS STEEL SS / MILD STEEL MS

MOUNTING POSITION VERTICAL V/ HORIZONTAL H / FREESTANDING FS

R Radiator/ RT Radiator & Heated Towel Rail/ T Heated Towel Rail / TR Heated Towel Rail & Radiator

Fuel Options (E/H/D) – Electric only/ Hot water systems/ Dual fuel systems

Finish S : Brushed Matt / P : Polished

Model Name	Height mm	Length mm	Depth mm	Fuel Options E/H/D	Pipes or Sections	Heat Output Delta T 50 C		E :Electric only	Brushed Matt - S	Polished P
						BTU	Watts	Choice of Elements Watts		
LOK12(S,P)	570	400	50	H	12	2172	636	H:Central Heating Only		
LOK21(S,P)	1020	400	50	H	21	3802	1113	H:Central Heating Only		
LOK30(S,P)	1470	400	50	H	30	5431	1590	H:Central Heating Only		
LOK36(S,P)	1770	400	50	H	36	5779	1692	H:Central Heating Only		
LOK45(S,P)	2220	400	50	H	45	8146	2385	H:Central Heating Only		

We recommend the 3 Bar Safety Valve for all ELECTRIC ONLY (E) products. Dual Fuel is possible either by use of « T » piece and radiator valve or by use of ONE850 or ONE851 (4 way valve)

